



**3463**

ISO 4028 IN 915

**KERN** 20  
PART SERVER 30



**3463 - d<sub>1</sub> x L<sub>1</sub>**



Z	dp	SW	d <sub>1</sub>	L <sub>1</sub>
2	2,5	2	M4	10
				12
3	4	3	M6	16
				20
				25
				30
4	5,5	4	M8	16
				20
				25
				30
5	7	5	M10	20

Z	dp	SW	d <sub>1</sub>	L <sub>1</sub>
5	7	5	M10	30
				40
				50
6	8,5	6	M12	30
				40
				50
8	12	8	M16	40
				50
				60

**3464**

ISO 4626 DIN 913

**KERN** 20  
PART SERVER 30

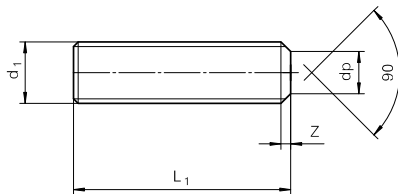

**3464 - d<sub>1</sub> x L<sub>1</sub>**

SW	z	dp	d <sub>1</sub>	L <sub>1</sub>
2	0,75	2	M4	6
				8
				10
				12
				12
2,5	0,75	3,5	M5	6
				8
				10
				12
				16
				16
				20
3	1	4	M6	8
				10
				12
				16
				20
				25
4	1,25	5,5	M8	30
				30
				30
				30
				8
				10
				12
				16

SW	z	dp	d <sub>1</sub>	L <sub>1</sub>
4	1,25	5,5	M8	40
				10
				12
				16
				16
5	1,5	7	M10	20
				25
				30
				35
				40
				45
				50
6	1,75	8,5	M12	12
				16
				20
				25
				30
				35
				40
8	2	12	M16	20
				30
				30
				40
				40

